



# To configure the motion detection on your camera DCS-930L:

## To configure the motion detection on your camera DCS-930L:

- 1- Log on to your mydlink account:
- 2- In settings → click on advanced settings :

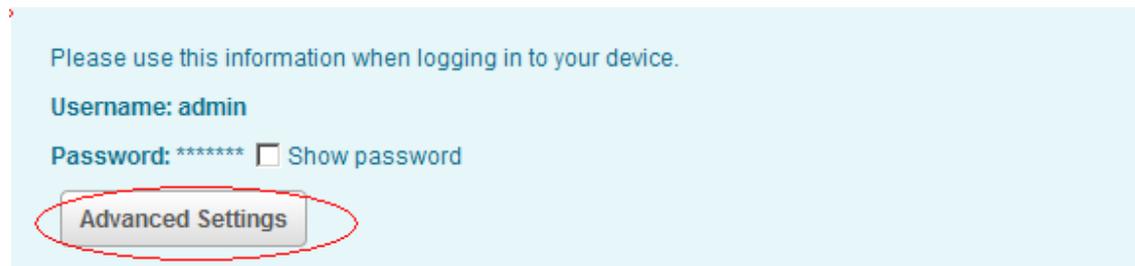

- 3- The web interface of your camera will be opened
- 4- Type your admin password
- 5- In the menu “**SETUP**” / select “**MOTION DETECTION**”:

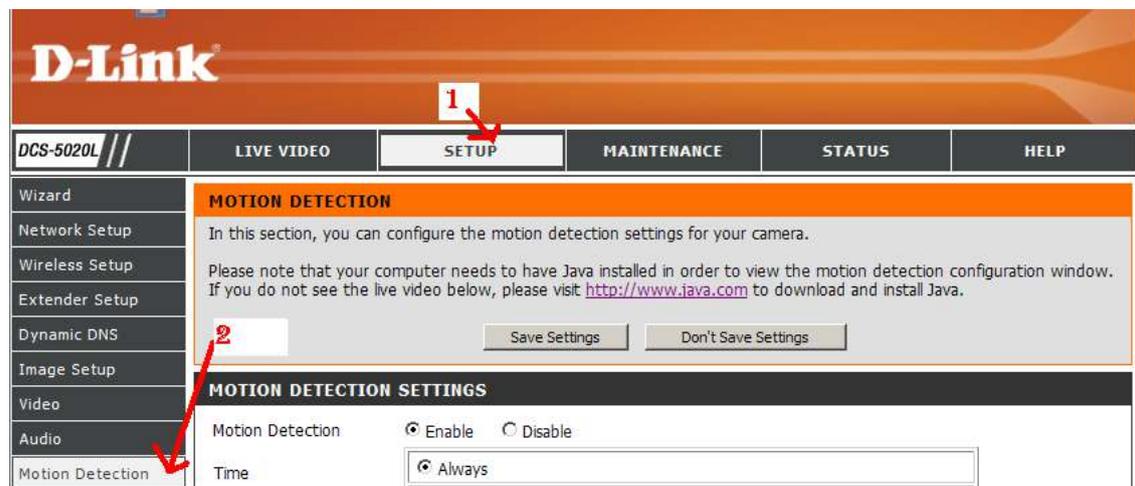

- 6- In “ **motion Detection Settings** “ select “**ENABLE** “ to activate the motion



- 7- If necessary, ensure you enable java for the site.

- 8- Select the **time** to activate the motion :

- a. **Always** : if you want that the motion will be always activate
- b. **Schedule** ; if you want to activate the motion for an fixed schedule:

# To configure the motion detection on your camera DCS-930L:

Time

<input checked="" type="radio"/> Always
<input type="radio"/> Schedule
Day <input type="checkbox"/> Mon <input type="checkbox"/> Tue <input type="checkbox"/> Wed <input type="checkbox"/> Thu <input type="checkbox"/> Fri <input type="checkbox"/> Sat <input type="checkbox"/> Sun
Time Period Start : <input type="text" value="00:00:00"/> (Example : 06:30:00)
Stop : <input type="text" value="00:00:00"/> (Example : 22:30:00)

9- **Select the sensitivity:** Specifies the measurable difference between two sequential images that would indicate motion. Enter a value between 0 and 100.

Sensitivity  % (0~100%, high sensitivity makes the motions easier to be detected.)

10-**Select the detection Area:** Left clicking in an area will enable motion detection monitoring, right clicking will stop the area being monitored for motion.



11- CLICK ON “SAVE SETTINGS” to save the parameters